

4/13/01  
3126/00  
10974 U.S. PTO  
09/093890  
06/29/01

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Juha SALO, et al

Serial No.:

Filed: June 29, 2001

Title: RECEIVER

Group:

LETTER CLAIMING RIGHT OF PRIORITYHonorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

June 29, 2001


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 0016238.8 filed June 30, 2000.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT &amp; KRAUS, LLP

  
Robert M. Bauer  
Registration No. 34,487RMB/nac  
Attachment  
(703) 312-6600

This Page Blank (uspto)



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

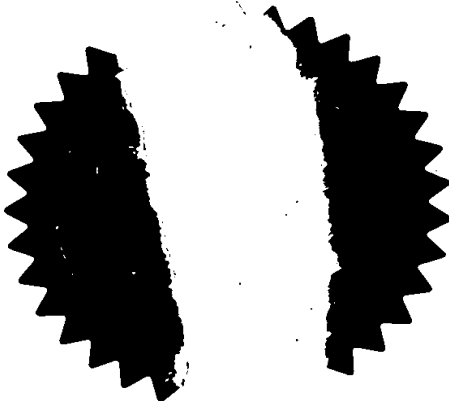

Signed

Dated 5 June 2001

**This Page Blank (uspto)**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

PAT 00107aGB

7th 22  
2/1 6/2/00

2. Patent application number

(The Patent Office will fill in this part)

0016238.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)


NOKIA OY  
KEILALAHDENTIE 4  
02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

750 443 4062

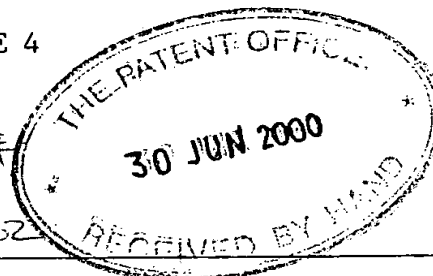

4. Title of the invention

RECEIVER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT  
NOKIA HOUSE  
SUMMIT AVENUE  
FARNBOROUGH  
HAMPSHIRE  
GU140NG UK

Patents ADP number (if you know it)

7577638001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

8

Claim(s)

3

Abstract

1

Drawing(s)

2+20

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

K L Jeffery

Date

KENDRA JEFFERY

12. Name and daytime telephone number of person to contact in the United Kingdom

Adam Franks 01252 865015

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# RECEIVER

5 The present invention relates to receivers such as multi-carrier and cellular receivers.

Cellular receivers, in the form of portable radiotelephones are commonplace, and their design and operation is well understood. Such portable radiotelephones can be used for making and receiving telephone calls, sending and receiving messages, and even browsing world-wide computer network such as the Internet. Many standards exist for portable radiotelephones, including global system for mobile communications (GSM), general radio packet service (GPRS)

15 Receivers capable of receiving digital television signals, such as signals according to the terrestrial digital video broadcasting (DVB-T) standard are also commonplace.

The use and operation of consumer set-top-boxes (STB) for receiving digital video broadcasting (DVB-T) transmissions are well known. Such STBs are capable of receiving a large number of digital television channels, data and other interactive services.

25 According to a first aspect of the present invention, there is provided a terminal having a first receiver for receiving a first signal from a first communications network comprising: a second receiver for receiving a second signal conveying complementary information relating to said first signal from a second communications network.

Advantageously, the present invention provides a receiver having a first and a second receiver for receiving signals from two different communications networks. In a first embodiment of the present invention this results in increased power efficiency, since one of the receivers can be effectively  
5 switched off whilst not required. Schedule or configuration data can, however, still be received on the other receiver. The received schedule or configuration data can be used to switch on the other receiver at an appropriate time. This configuration allows the receiver to receive non-scheduled data, such as news flashes, results from sporting events, share prices etc.

10

According to a second aspect of the present invention, there is provided apparatus for transmitting a signal to a receiver via a first communications network comprising: a transmitter for transmitting complementary information relating to said signal via a second communication network.

15

According to a third aspect of the present invention, there is provided a method of receiving a first signal from a first communications network comprising: receiving a second signal conveying complementary information relating to said first signal from a second communications network.

20

According to a fourth aspect of the present invention, there is provided a method of transmitting a signal to a receiver via a first communications network comprising: transmitting complementary information relating to said signal via a second communication network.

25

The invention will now be described, by way of example only, with reference to the accompanying diagrams, in which:

Figure 1 is a block diagram of a typical consumer receiver/transmitter  
30 arrangement; and



Figure 2 is a block diagram of a first embodiment according to the present invention.

Figure 1 is a block diagram of a typical consumer receiver/transmitter arrangement in which a terrestrial digital video broadcasting (DVB-T) transmitter 150 transmits a DVB-T signal to a DVB-T set-top-box receiver 106.

In the transmitter 150, a number of television channels 154 and 156 are multiplexed together with a number of data channels 158 and 160 by a multiplexer 152. In addition to this, service information (SI) 162, which contains details of each of the other multiplexed channels, is also input to the multiplexer 152, provided by a SI generator 164. The multiplexer creates a single, multiplexed, signal 166 which contains all of the separate channels 154, 156, 158 and 160, along with the SI 162. Further details of the multiplexing and SI may be found in the DVB-T specification (EN 300 468) which is incorporated herein by reference. The multiplexed signal 166 is transmitted via an antenna 164, across a transmission channel, to an antenna 102 of a set-top-box receiver 106. In the case of DVB-T, the transmission channel is a terrestrial transmission channel. However, the transmission channel could, alternatively, be a satellite, microwave, cable or optical channel.

The signals received by the antenna 102 are input to a DVB-T receiver 100 which enables the user to select a desired channel. Received data may also be stored in a memory 104.

Whilst the set-top-box 106 is switched on, the DVB-T receiver 100 is also powered up and receiving DVB-T signals. The DVB-T receiver is constantly decoding SI information which provides details of the content and location of each of the channels within the received multiplexed signal. The SI

information also contain schedule details for each of the multiplexed channels. The schedule details allow a user to watch or record a specific programme of interest. For example, if the set-top-box 106 is connected to a personal computer (not shown), it is possible to receive data transmitted over the DVB-T network for use with the personal computer. In this way, the transmission of large data files can be broadcast, to a large audience, using the high data rates provided by DVB-T transmission. If a data file is due to be transmitted at a certain time on a certain channel, the SI information will contain this information which can be used by the personal computer to ensure that receiver receives the required data.

SI information may change frequently, to reflect not only changes in program scheduling, but also to reflect re-allocation of frequencies and channels etc by the broadcaster. For example, it is possible for a channel to broadcast on a different frequency to originally scheduled. Since the SI contains details of the frequencies (or changes to the frequencies), a receiver should always be able to receive the desired channel and/or program. Some set-top-boxes store SI information in a memory, thereby allowing users to browse a schedule or program guide. However, due to the nature of SI information, the SI information is updated frequently to ensure that no discrepancies exist between the SI stored by the set-top-box and the SI being transmitted by the broadcaster.

Figure 2 shows a block diagram of a first embodiment according to the present invention. A mobile terminal 200 receives DVB-T transmissions from a DVB-T transmitter 272. The transmitted DVB-T signal is a multiplexed signal produced by a multiplexer 250. The multiplexer 250 accepts as inputs a number of channels 252, 254, 256 and 258 to produce the multiplexed signal. The channels may be television, audio or data channels. Service information (SI) data, which contains details of the multiplexed channels, is also input to

the multiplexer 250. The SI data is generated by a SI generator 260, which may be a database containing schedule and location details of each of the channels.

- 5 The DVB-T signals are received by an antenna 210 of the mobile terminal 200 and are received and decoded by a DVB-T receiver 202.

In addition, and advantageously, the mobile terminal also receives an interactive channel from a cellular or other transmission network 274 at a  
10 cellular transceiver 206. The cellular transceiver 206 allows both the reception and transmission of signals between the mobile terminal 200 and the cellular network 274. The cellular network may be a GSM network, a general packet radio service (GPRS), third generation (3G) or other suitable network.

15

SI data generated by the SI generator 260 is also supplied to a profiler 262 of the cellular network 274. The profiler contains a database of information about each of the subscribers to the cellular network 274. The profiler may contain information such as, demographic data, income level, sports leisure interests,  
20 etc.

The operation of a first embodiment of the present invention will now be described by way of example.

- 25 According to the prior art, if a user wishes to receive a video clip each time his favourite football team scores during a football match, it is necessary that the DVB-T receiver 100 in the DVB-T set-top-box 106 is constantly powered up and is constantly receiving SI data. This is since the exact timing of when a goal will be scored is not known in advance. Accordingly, no schedule will  
30 exist in the SI data for this event. A DVB-T receiver must therefore wait for the

SI data to indicate when the video clip will be broadcast. If the user is only interested in receiving video clips of the football match, this is particularly inefficient in terms of power consumption, especially for mobile terminals, since the DVB-T receiver just waiting, consuming power, for a specific video clip to be broadcast.

According to a first embodiment of the present invention, as exemplified in Figure 2, the subscriber registers his interest in receiving video clips with the profiler 262 of the cellular network 274. The DVB-T receiver 202 of the mobile terminal 200 may then be powered down. When a goal is scored, and a video clip is available for broadcast, the broadcaster must schedule the video clip to be included in the existing DVB-T multiplex signal. This may involve rescheduling existing programs, and updating the SI data accordingly. Once a scheduled time has been established for the broadcast of the video clip, a service announcement is sent by the cellular network 274 to the cellular transceiver 206. The service announcement is received by the cellular transceiver 206 and is processed by the controller 204. The controller informs the DVB-T receiver 202 of when the video clip will be broadcast and other relevant associated data, such as channel location, encryption parameters etc. The DVB-T receiver can be powered up and configured in time to receive and decode the video clip. The video clip may also be stored in a memory 208. Once the desired video clip, or other data, has been received, the DVB-T receiver 202 can be once again powered down.

The service announcement may be in the form of SI data, or may alternatively be in the form of a special short message service (SMS) message containing the necessary timing and location information required by the DVB-T receiver. Alternative forms of service announcement may be used, both in terms of the data required to be sent and the protocol which is used for sending it.

In this way, the DVB-T receiver 202 can be powered down when not required for actual reception of data. This can produce large savings in power consumption, compared to the system of the prior art.

- 5    The profiler 262 also controls whether requested information is transmitted to a user via the DVB-T or cellular network. For example, if one million people have requested to see a video clip of goals from a particular football match, it is better to transmit the video clip via the DVB-T network. For such a large number of users, the DVB-T network provides a cost effective delivery means.
- 10   The alternative would be to individually send the video clip via the cellular network which, with so many users, could impact severely on the operation of the cellular network.

15   If the number of users requesting to see a particular video clip is much smaller, it may be more economical to send it individually via the cellular network. The exact threshold levels will vary according to the pricing structure of the DVB-T and cellular networks, as well as the number of users requesting a particular item, and the volume of data required to be sent.

- 20   The cellular transceiver 206 may also be used to send an acknowledgement back to the cellular network 274, indicating whether the video clip was correctly received. This may be used for billing purposes, or also to request a re-sending of the video clip if it not received due to poor signal strength etc. Re-sending of the video clip may again take place either via the DBV-T or
- 25   cellular network depending on demand and cost effectiveness.

A further advantage of the present invention is that, if schedule announcements are sent over the cellular network, it is possible to remove some or all of the SI data from DVB-T network. Since the SI data typically

occupies up to  $3\text{Mbits}^{-1}$  this redundant bandwidth could be used for providing additional data or video channels.

In a further embodiment of the present invention, a profiler may be included in the mobile terminal 200. This may be instead of, or in addition to, the profiler 262 of the cellular network 274. A profiler on the mobile terminal may be used if the communications network used for the interactive channel supports broadcasting of data, such as via a GPRS network or other packet type network. The profiler can be configured according to user preferences, and will only accept service announcements which comply with the user preferences.

Those skilled in the art will appreciate that although the present invention is described above with reference to DVB-T transmissions, the invention is not limited thereto. The same techniques could be applied to DVB (satellite) reception and transmission or any other similar or equivalent standards. Equally, references to cellular networks and cellular transmission techniques could be replaced by fixed line, public switched telephone networks, or any other type of suitable communications network.

**CLAIMS**

1. A terminal having a first receiver for receiving a first signal from a first  
5 communications network comprising:  
a second receiver for receiving a second signal conveying complementary  
information relating to said first signal from a second communications  
network.
2. A terminal according to claim 1, further comprising a controller for  
10 configuring said first receiver according to said complementary  
information.
3. A terminal according to claim 1 or 2, wherein said first receiver is enabled  
to receive said first signal in response to said complementary information.
4. A terminal according to claim 1, 2 or 3, wherein said complementary  
15 information comprises schedule and configuration data.
5. A terminal according to any preceding claim, further comprising storage  
means for storing user preferences.
6. A terminal according to claim 5, further comprising decision means for  
deciding whether said second signal should enable said first receiver in  
20 dependence on the stored user preferences.
7. A terminal according to any preceding claim, wherein said first signal is a  
digital video broadcasting (DVB) signal, and said first receiver is a digital  
video broadcasting (DVB) receiver.
8. A terminal according to any preceding claim, wherein said second signal is  
25 a global system for mobile (GSM) signal, and said second receiver is a  
global system for mobile (GSM) receiver.
9. A terminal according to any of claims 1 to 7, wherein said second signal is  
a general packet radio service (GPRS) signal, and said second receiver is  
a general packet radio service (GPRS) receiver.

10. Apparatus for transmitting a signal to a receiver via a first communications network comprising:  
a transmitter for transmitting complementary information relating to said signal via a second communication network.
- 5 11. Apparatus according to claim 10, wherein said complementary information comprises schedule and configuration data relating to said first signal.
12. Apparatus according claim 10 or 11, further comprising storage means for storing details of subscriber preferences.
- 10 13. Apparatus according to claim 12, further comprising decision means for deciding to which subscribers to transmit said second signal in dependence on said stored subscriber preferences.
14. Apparatus according to any of claims 10 to 13, wherein said first signal is a digital video broadcasting (DVB) signal, and said first communications network is a digital video broadcasting (DVB) network.
- 15 15. Apparatus according to any of claims 10 to 14, wherein said second communications network is a global system for mobile (GSM) network, and said transmitter is a global system for mobile (GSM) transmitter.
16. Apparatus according to any of claims 10 to 14, wherein said second communications network is a general packet radio service (GPRS) network, and said transmitter is a general packet radio service (GPRS) transmitter.
- 20 17. A method of receiving a first signal from a first communications network comprising:  
receiving a second signal conveying complementary information relating to said first signal from a second communications network.
- 25 18. A method according to claim 17, further comprising receiving said first signal in accordance with said complementary information.
19. A method according to claim 17 or 18, further comprising storing user preferences.



20. A method according to claim 19, further comprising deciding whether said second signal should be received in dependence on said stored user preferences.
- 5 21. A method of transmitting a signal to a receiver via a first communications network comprising:  
transmitting complementary information relating to said signal via a second communication network.
- 10 22. A method according to claim 21, wherein the step of transmitting complementary information comprises transmitting schedule and configuration data relating to said signal.
23. A method according to claim 21 or 22, further comprising storing details of subscriber preferences.
- 15 24. A method according to claim 23, further comprising deciding whether to transmit said complementary information to a subscriber in dependence on said stored preferences.
25. A method according to any of claims 21 to 24, comprising transmitting said signal as a digital video broadcasting (DVB) signal.
26. A method according to any of claims 21 to 25, comprising transmitting said complementary information via a global system for mobile (GSM) network.
- 20 27. A method according to any of claims 21 to 25, comprising transmitting said complementary information via a general packet radio service (GPRS) network.
28. A terminal substantially as hereinbefore described with reference to the accompanying drawings.
- 25 29. Apparatus for transmitting a signal substantially as hereinbefore described with reference to the accompanying drawings.
30. A method of receiving substantially as hereinbefore described with reference to the accompanying drawings.
31. A method of transmitting substantially as hereinbefore described with  
30 reference to the accompanying drawings.

**ABSTRACT**

The present invention relates to receivers such as multi-carrier and cellular receivers.

5



Cellular receivers, in the form of portable radiotelephones are commonplace, and their design and operation is well understood. Such portable radiotelephones can be used for making and receiving telephone calls, sending and receiving messages, and even browsing world-wide computer  
10 network such as the Internet. Many standards exist for portable radiotelephones, including global system for mobile communications (GSM), general radio packet service (GPRS)

Receivers capable of receiving digital television signals, such as signals  
15 according to the terrestrial digital video broadcasting (DVB-T) standard are also commonplace.

The present invention provides a method and apparatus for receiving and transmitting signals via multiple communication channels.

20

1/2

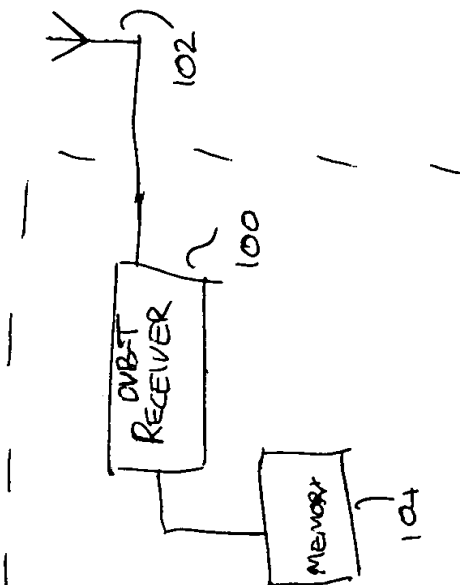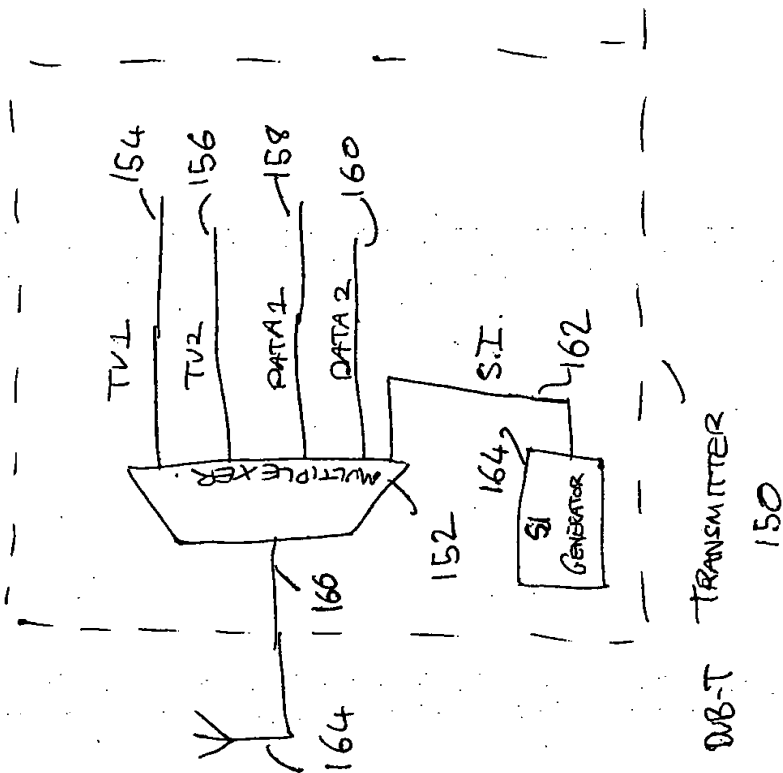

Prior Art

FIGURE 1.

**This Page Blank (uspto)**

2/2

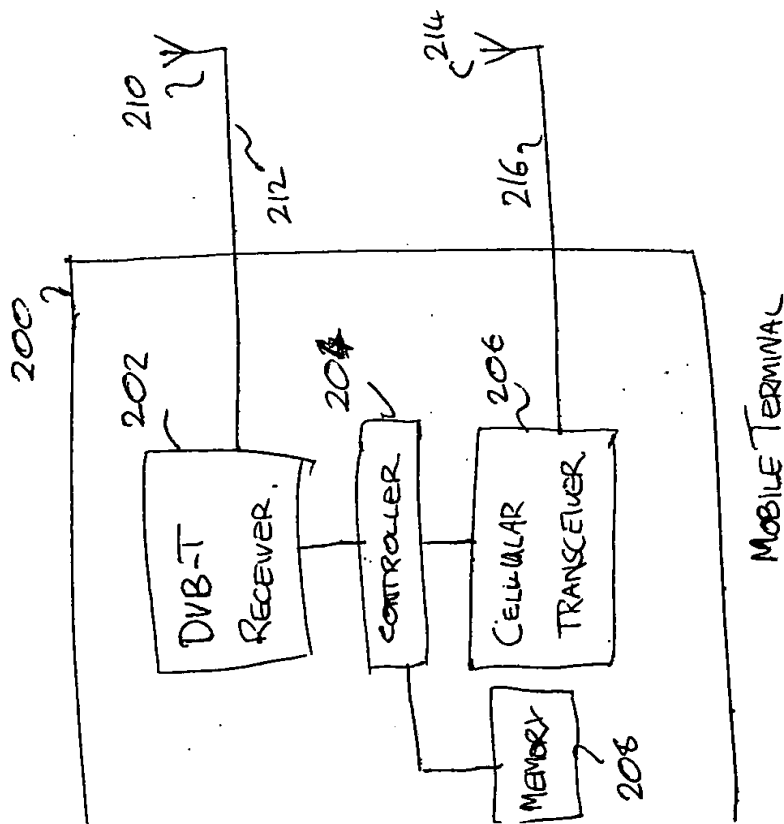
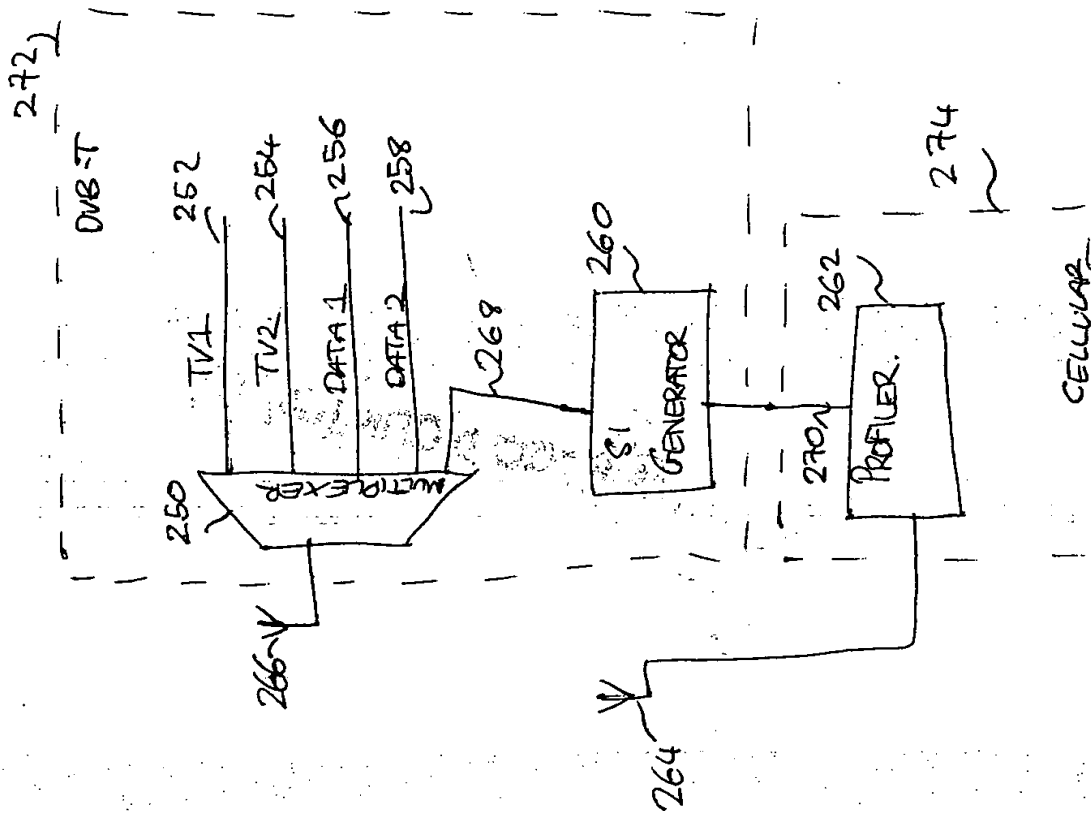


FIGURE 2.

**This Page Blank (uspto)**